

**Report Number**. ..... HA21NB051522O

Applicant's name...... LANKAO RAYER LIGHTING PRODUCT CO., LTD

Applicant's address ...... Enterprise Zone, No.001, Yifeng township, Lankao, Kaifeng, China

Name of manufacturer ...... Same as Applicant

Address of manufacturer...... Same as Applicant

Name of factory (ies)...... Same as Applicant

Address of factory (ies) ...... Same as Applicant

Product Name ...... Approach-guide light

Trade Mark(s) ...... /

**Ratings** ...... DC24V, 3W

Total number of pages ...... 12 pages

**Standard** .....: EN 60529:1991 + A1:2000 + A2:2013

IEC 60529:1989 + A1:1999 + A2:2013

Date of Receipt sample ...... May 12, 2021

Date of issue ...... May 14, 2021

Test Report Form No...... HATEK60529 IP65A

Test Result ...... Pass\*

#### \*Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and reviewer.

### Prepared By:

Ningbo HATEK Co., Ltd.

6F, No. 65, Mujin Road, National Hi-Tech Zone, Ningbo, Zhejiang 315013, China

Prepared by:

Paul Gao / Project Engineer

Miranda Wo Techn

Technical Manager



Page 2 of 12 Report No.: HA21NB051522O

## **TEST REPORT**

#### List of test items:

Test Model	Test Items	Result		
24V2GP45COB1WW	IP6X test	Pass		
24V2GP45COB1WW	IPX5 test	Pass		

Remark: The three models are different in height, but the structure is exactly the same. So we select model 24V2GP45COB1WW to test.





Page 3 of 12 Report No.: HA21NB051522O

### **TEST REPORT**

#### Test Items:

Test for protection against solid foreign objects: IP6X

#### **Test Method:**

The tests should be carried out under the standard atmospheric condition.

The atmospheric conditions during tests are as follows:

Temperature range: 15°C to 35°C.

Relative humidity: 25% to 75%.

The enclosure under test is supported inside the test chamber and the pressure inside the enclosure is maintained below the surrounding atmospheric pressure by a vacuum pump.

A volume of air 80 times the volume of the sample enclosure tested without exceeding the extraction rate of 60 volumes per hour. In no event shall the depression exceed 2kPa.

If an extraction rate of 40 to 60 volumes per hour is obtained the duration of the test is 2h.


If, with a maximum depression of 2kPa, the extraction rate is less than 40 volumes per hour, the test is continued until 80 volumes have been drawn through, or a period of 8h has elapsed.

#### **Acceptance Conditions:**

The protection is satisfactory if no deposit of dust is observable inside the enclosure at the end of the test.

Test Result:						
No deposi	t of dust is observal	ole inside the en	closure.			
⊠ Pass	☐ Fail					
	V 10. T					



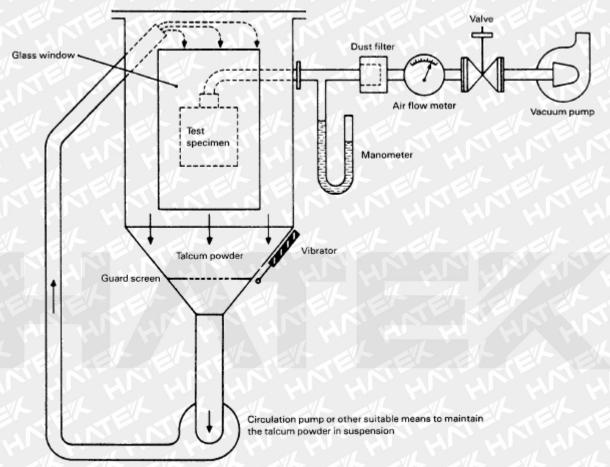

IEC 280/01

Report No.: HA21NB051522O

Page 5 of 12 Report No.: HA21NB051522O

### **TEST REPORT**

#### Test Item:

Tests for protected against water jets: IPX5

#### **Test Method:**

Internal diameter of the nozzle: 6.3mm;

Delivery rate: 12.5L/min ± 5%;

Water pressure: to be adjusted to achieve the specified delivery rate;

Core of the substantial stream: circle of approximately 40mm diameter at 2.5m distance from nozzle;

Test duration per square meter of enclosure surface area likely to be sprayed: 1min;

Minimum test duration: 3min;

Distance from nozzle to enclosure surface: between 2.5m and 3m.

#### **Acceptance Conditions:**


In general, if any water has entered, it shall not:


- be sufficient to interfere with the correct operation of the equipment or impair safety;
- reach live parts or windings not designed to operate when wet;
- accumulate near the cable end or enter the cable if any.

#### **Test Result:**

No water entered into the enclosure.

□ Pass □ Fail

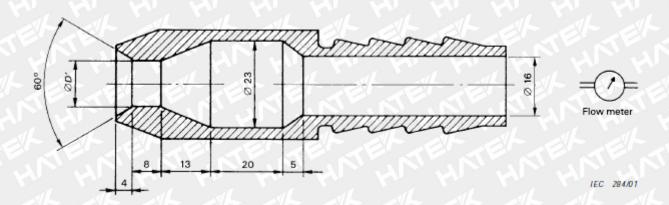






# **TEST REPORT**

#### **Photos:**








Report No.: HA21NB051522O








Report No.: HA21NB051522O







Report No.: HA21NB051522O



After the test IP6X








# **TEST REPORT**













## **TEST REPORT**

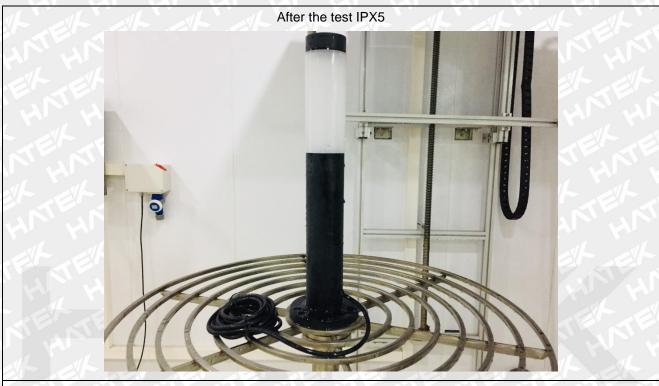








# **TEST REPORT**

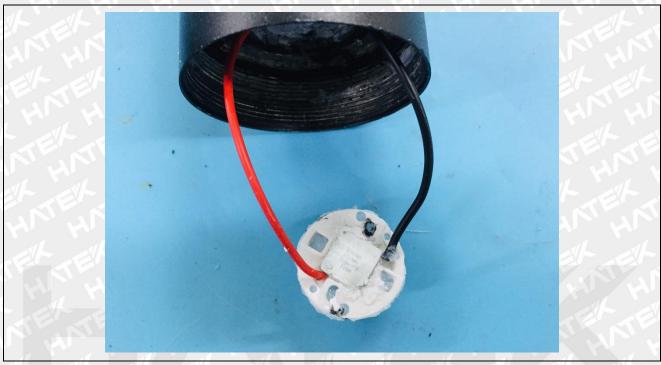

===End of Test Report ====